



## HDMI Digital Microscope CE210T-C


www.lanoptik.com

## CE210T-C

## HDMI Digital Microscope (Type C)


- Designed for convenient tabletop inspection
- Ergonomic design, 360° universal pivot bracket, hovering freely
- Ultra-high dynamic range up to 128dB allows you to see more details
- Dual LED ring lights provide diffuse and high-contrast lighting with independent controls to find the perfect balance
- Can output image directly to monitor through HDMI or connect with PC through USB
- Includes image recording and editing software for Windows
- Lightweight and compact design, without complicated cables and accessories, easy to install and keep the table clean.

Model	CE210T-C
Optical Magnification	0.11X ~ 0.79X
Working Distance	44mm ~230mm
Depth of Field	0.8mm ~ 6.5mm
Observation Scope	7mmx4mm (49.4X) to 45mmx25mm (4.5X)
Camera Resolution	2.0 MP (1920 x 1080 pixels)
Sensor Type	Sony IMX291 CMOS (color)
Sensor Size	1/2.8" (Diagonal: 6.46mm)
Pixel Size	2.9µm x 2.9µm
Dynamic Range	128 dB
Shutter	Electronic rolling shutter
Sensitivity	1300mV @ 1/30s (f/5.6)
Video Resolutions	1920x1080 30fps, 1280x720 60fps
File Formats	JPG (photo), MOV (video)
Recording Media	MicroSD up to 128GB
I/O	I/O Mini-HDMI (video out), USB-C (data and power)
Ring Light 1	18 LED
Ring Light 2	13 LED
Power Requirements	DC 5V 900mA over USB

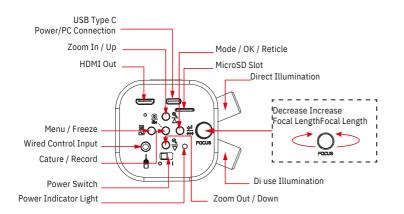





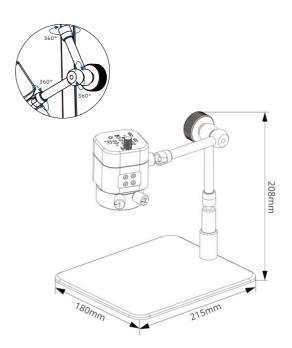

Specifications are subject to change without any obligation on the part of the manufacturer.



## LANOPTIK TECHNOLOGIES LTD

No. 72 Hongjing Street, Lejia Road, Baiyun District, Guangzhou, China. 510400 Phone: +86 20 3898 6017 | Fax: +86 20 3847 6076 Website: http://www.lanoptik.com | Email: info@lanoptik.com